

Perlick® LOW HEIGHT SELF-CONTAINED BACK BAR REFRIGERATOR

1-, 2-, 3- AND 4-DOOR



BBSLP60 with stainless steel door shown



ecofriendly
R290 Hydrocarbon Refrigerant

JOB	
AREA	
ITEM NO.	
MODEL NO.	

BBSLP36	1-Door Model
BBSLP60	2-Door Model
BBSLP84	3-Door Model
BBSLP108	4-Door Model

NSF/ANSI Standard 7 Listed for open food storage.
Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.


MODEL NUMBERS		BBSLP36	BBSLP60	BBSLP84	BBSLP108
NUMBER OF COMPARTMENTS		1	2	3	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	36 (914)	60 (1524)	84 (2134)	108 (2743)
	Depth - in. (mm)	24¾ (629)	24¾ (629)	24¾ (629)	24¾ (629)
	Height - in. (mm)	29 (736)	29 (736)	29 (736)	29 (736)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	20 (508)	44 (1118)	68 (1727)	92 (2337)
	Depth - in. (mm)	18¾ (476)	18¾ (476)	18¾ (476)	18¾ (476)
	Height - in. (mm)	25⅞ (646)	25⅞ (646)	25⅞ (646)	25⅞ (646)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		6.2 (176)	13.3 (377)	20.7 (586)	27.9 (790)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	98/196	238/448	371/721	504/973
	STAGGERED - 12 OZ. BOTTLE/CAN	112/220	268/268	420/812	572/1100
SHIPPING WEIGHT Lbs. (kg.)		223 (101)	300 (136)	431 (195)	590 (267)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.8	2.5	4.2	4.2
	Electrical Connection	Cord connected	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	8'	8'	8'	8'
	Defrost Initiation	Automatic	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle	Off cycle
	Thermostat	Digital control	Digital control	Digital control	Digital control
	Lighting Type	LED	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/6	1/5	1/4	1/4
	Refrigerant	R290	R290	R290	R290
	Refrigerant Charge (grams)	90	100	90	90
	Factory Temperature Setting - Refrigerator F (C)	36° (2.2°)	36° (2.2°)	36° (2.2°)	36° (2.2°)
	Temperature Range - Refrigerator F (C)	33°-46° (0.5°-7.7°)	33°-46° (0.5°-7.7°)	33°-46° (0.5°-7.7°)	33°-46° (0.5°-7.7°)
	Factory Temperature Setting - White Wine F (C)	45° (7.2°)	45° (7.2°)	45° (7.2°)	45° (7.2°)
	Factory Temperature Setting - Red Wine F (C)	60° (15.5°)	60° (15.5°)	60° (15.5°)	60° (15.5°)
	Temperature Range - Wine F (C)	40°-65° (4.4°-18.0°)	40°-65° (4.4°-18.0°)	40°-65° (4.4°-18.0°)	40°-65° (4.4°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube	Capillary tube	Capillary tube
	Pull-Out Condensing Unit	Yes	Yes	Yes	Yes
Front Vented	Yes	Yes	Yes	Yes	

Form No. Z2427
Rev. 12.18.2018

Perlick® LOW HEIGHT SELF-CONTAINED BACK BAR REFRIGERATOR 1-, 2-, 3- AND 4-DOOR

Note: Open floor drain not provided on models intended for non-packaged food.

Low Height Self-Contained Back Bar

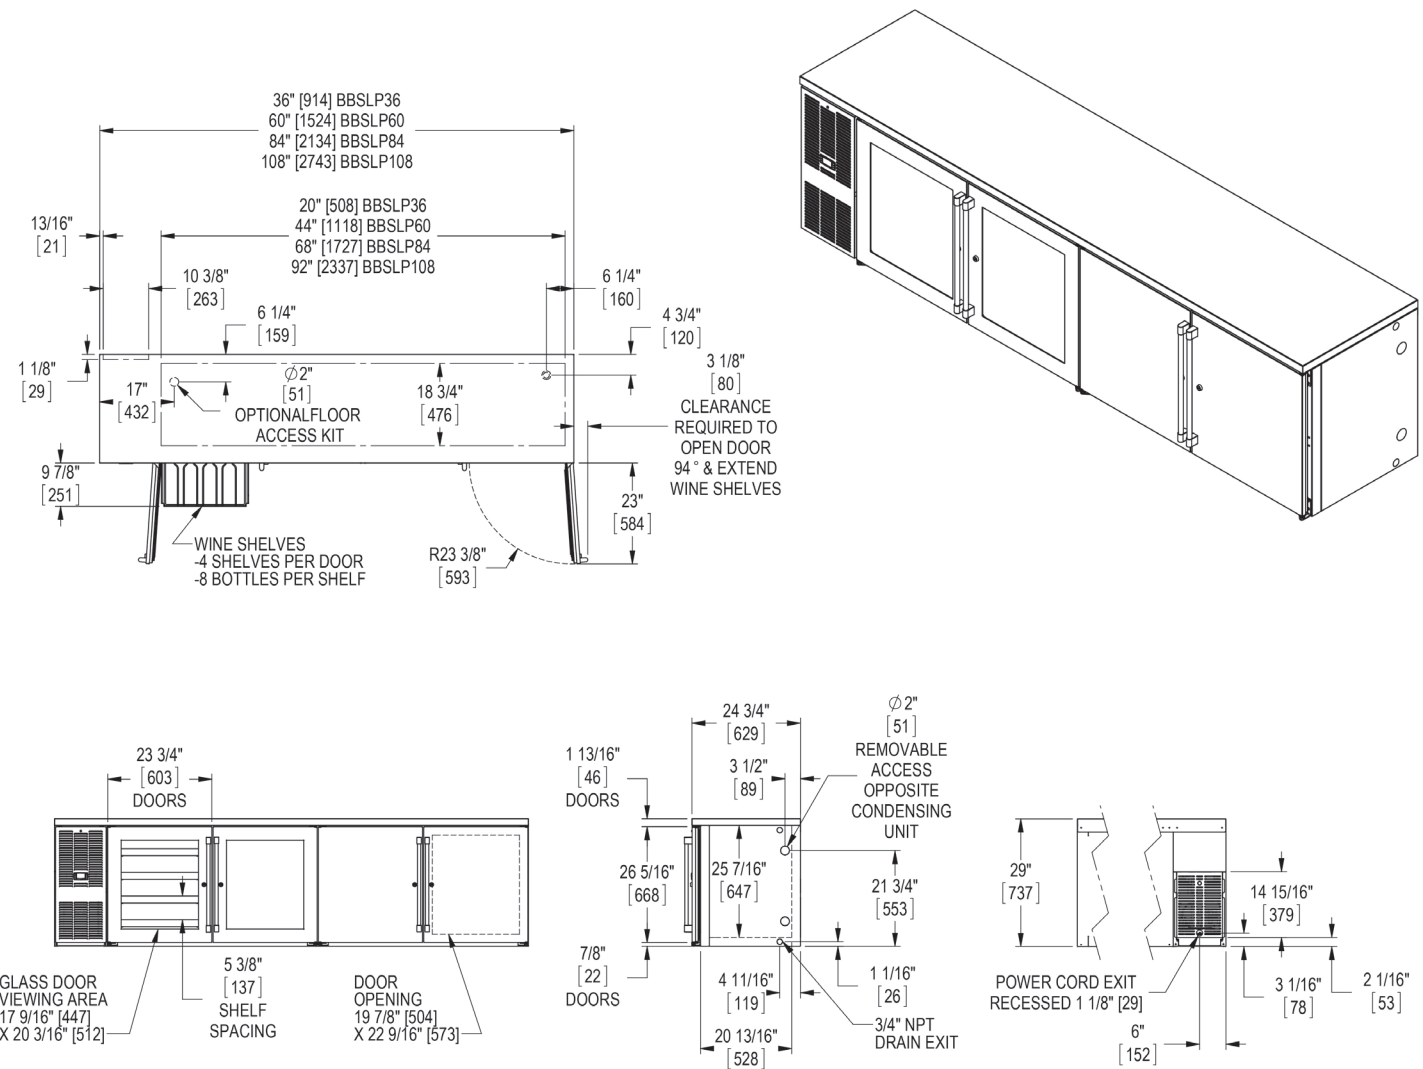

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm, For more information go to www.P65Warnings.ca.gov.

Form No. Z2427
 Rev. 12.18.2018