PROJECT:		
ITEM #		QTY:
MODEL #		
AIA #	SIS #	

REFRIGERATION• Refrigeration System Uses R-290 Refrigerant To Comply With

Adaptive Defrost For Reduced Energy Consumption And More

Refrigerator Capable Of Maintaining Product Temperature

WORKTOP DRAWER REFRIGERATOR

VWRD60HC-2



All Environmental Concerns

Rear Mounted Refrigeration System

Consistent Product Temperatures

Epoxy Coated Evaporator Coil

36°F to 38°F











CABINET CONSTRUCTION

- · Stainless Steel Exterior (galvanized back & bottom)
- **Aluminum Interior**
- 20 Gauge Stainless Steel Doors/Drawers
- · 4" High, Foamed-In-Place Backsplash
- · One Piece, Snap-In Magnetic Door/Drawer Gaskets
- · 6" Casters, Two With Brakes
- · 8' Cord And Plug (see electrical data for details)

FEATURES

- · Full Electronic Control
- · Stay-Open Drawer Feature For Easy Product Loading
- · Low Profile Horizontal Drawer Handles
- · Heavy-Duty Spring Loaded Cartridge Hinges
- · Heavy-Duty Pan Supports Provided
- Drawers Accommodate 6" Deep Full Size Food Service Pans (pans not included)
- · Telescoping Drawer Slides With Locking Mechanism
- Epoxy Coated Shelves (2 per section)
- 3 Year Parts & Labor Warranty
 - Plus An Additional 4 Year Compressor Warranty
- **Exclusive 2 Year Warranty On Magnetic Drawer Gaskets**
- Lifetime Warranty On Handles & Hinges (Parts Only)

OPTIONS & ACCESSORIES

- · Stainless Steel Interior
- · Stainless Steel Back
- · Secure-Temp™ Technology
- · Door/Drawer Locks

· Shelf Clips

· Cutting Board

· Additional Shelves

· 6" Legs or 6" Seismic Legs

- · Door Swing Orientation (at time of order) · Casters: 3", Roller Kit, Low Profile

Please verify qualifying units by visiting:

www.energystar.gov/cfs

see note on back on page)

 Remote Models* (6" legs only) (refrigerant must be specified at time of order,

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168


Rev 12/23/19 Printed in U.S.A.


APPROVAL: __ _ DATE: _


VORKTOP DRAWER REFRIGERATO




VWRD60HC-2





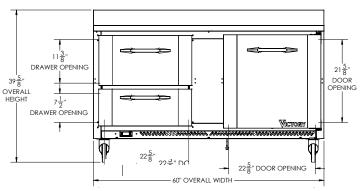



We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS		
Net Capacity	14.75	Cabinet Voltage	115/60/1	Height	48"	
Width, Overall (in.)	60"	Total Amperes	3.0	Width	62"	
Depth, Overall (with handle)	32 5/8"	NEMA Plug*	5-15P	Depth	37"	
Height Overall (6" casters)	39 5/8"	REFRIGERATION DATA		Crated Weight	398 lbs	
Depth, Door Open 90°	55 1/8"	Condensing Unit Size, HP*	1/5			
Drawer Openings (in.)	22 5/8" x 11 3/8" 22 5/8" x 7 1/2"	Refrigerant*	R-290	*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.		
Door Openings (in.)	22 5/8" x 21 5/8"	Capacity (BTU/HR) (100°F/20°F)	1350			
No. Of Door/Shelves/Drawers	1/2/2					

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 12/23/19 Printed in U.S.A.

