

# PRECISIONBREW®

## WARMER SHUTTLE® BREWERS

Project

Date

Models

**PBC-1W**  
**PBC-2W**

Item #

Quantity



**Model PBC-1W**

air-heated Shuttles and graphics sold separately



**Model PBC-2W**


air-heated Shuttles and graphics sold separately

## Features

- Single and twin digital models brew into 1.5 gallon (5.7 L) warmer Shuttle(s).
- Brews to the Golden Cup Standard as defined by the Specialty Coffee Association for the highest quality brew possible.
- Digitally controlled with PrecisionBrew Technology.
- Three independent brew volumes let you be prepared for a busy morning rush and eliminate waste during slower sales periods.
- With the twin model, you can have two different coffee brews in side-by-side dispensers and expand your beverage offerings.
- 3.2 gallon (12.1L) heating tank per brew head.
- Advanced touchscreen digital interface simplifies and streamlines brewing and operation.
- Eliminate the need for troubleshooting and unnecessary service calls with the self-diagnostics alerts on the touch display.
- Minimal training with icon-driven programming.
- Shuttle sensors prevent brewing when server is not in place or is not aligned properly, and the brew basket is locked into place and cannot be removed before the completion of a brew cycle.



# PRECISIONBREW® WARMER SHUTTLE® BREWERS

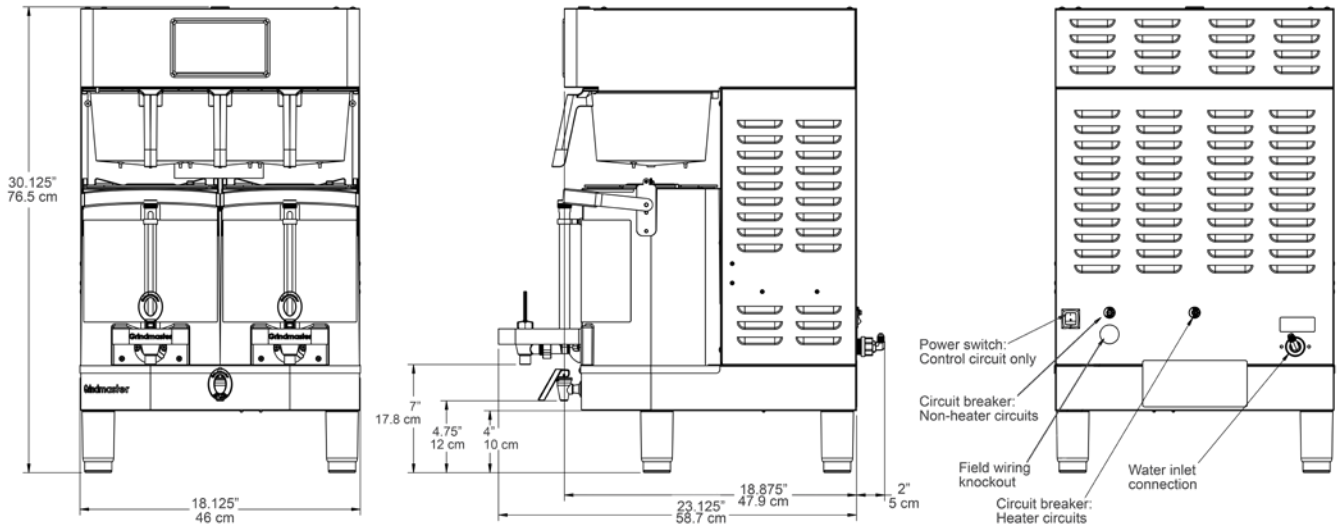

model PBC-2W represented



MODEL	DESCRIPTION	BREW VOLUMES	ELECTRICAL	PRODUCT DIMENSIONS (H X W X D)	SHIPPING DIMENSIONS (H X W X D)	SHIP WEIGHT
<b>PBC-1W</b> (1004-002)	Single digitally controlled warmer shuttle brewer	0.5, 1.0, 1.5 gal (1.9, 3.8, 5.7 L)	240V 7.0 kW 60Hz 1 Ph	30.13" x 9.13" x 18.88" (77 cm x 23 cm x 50 cm)	30.88" x 14.13" x 25.75" (78 cm x 36 cm x 65 cm)	50 lbs. (22.7 kg)
PBC-2W (1004-004)	Twin digitally controlled warmer shuttle brewer	0.5, 1.0, 1.5 gal (1.9, 3.8, 5.7 L)	240V 7.0 kW 60Hz 1 Ph	30.13" x 18.13" x 18.88" (77 cm x 46 cm x 50 cm)	30.88" x 23.13" x 25.75" (78 cm x 59 cm x 65 cm)	80 lbs. (36.3 kg)

**Plumbing:** 0.25" (0.64 cm) flare water line at 30-80 psi required.

#### OPTIONS

**Air-heated Shuttle:** (2503-006) - 1.5 gal. (5.7 L) Shuttle

**Air-heated Shuttle Stand:** (1503-004) - 120V / 0.11kW / 60 Hz / 1 Ph.  
NEMA 5-15P line cord included.

**Graphics for Air-heated Shuttle:** (380-00336)

Grindmaster™ 4003 Collins Lane, Louisville, KY 40245 USA

Tel: +1.502.425.4776 / 800.695.4500 (USA & Canada only) • Fax: +1.502.425.4664 • www.grindmaster.com

© 2020 Grindmaster™ PRINTED IN USA | 0318 Form # BW-201-03