BEVERAGE-AIR

Project:	AIA
tem:	
_ocation:	SIS
Approved:	

MODEL: HBRF23HC-1-A

DUAL TEMPERATURE REFRIGERATOR/FREEZER

HBRF23HC Half-Solid Door Bottom Mount Reach-In Hydrocarbon Series



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Full electronic control with one-touch defrost
- Dual temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- · Refrigerator is top section
- Bottom freezer is section
- One-piece grille allows easy removal/installation for preventative maintenance
- Door locks standard
- Self closing door, 120° stay open feature with spring-loaded style hinges
- Snap-in magnetic door gaskets for easy cleaning and replacement
- Two (2) heavy-duty epoxy coated wire shelves per section
- LED lighting standard
- 6" Heavy-duty casters with (2) brakes
- · Certified for open food product

OPTIONS & ACCESSORIES

- · Epoxy shelves
- Shelf clips
- 3" Caster or 6" legs
- Wine temperature control
- Door swing orientation (at time of order)
- Remote option* (see note on back page)

r 🕀 us 🥘 🔯 🧐 🖉 🕰

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil

Please verify qualifying units by visiting:

- Refrigerator maintains product temperatures between 36°F to 38°F
- Freezer maintains product temperature to -10°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	HBRF23HC-1-A	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 1/4"	
Depth Overall (with handle)	33 3/4"	
Height Overall (with casters)	84"	
Number of Doors	2	
Depth with Door Open 90 ⁰	57 3/8"	
Door Openings (in)	24 1/8" x 24 5/8"	
INTERNAL DIMENSIONAL DATA		
NET Capacity Refrigerator Top (cubic ft.)	8.65	
NET Capacity Freezer Bottom (cubic ft.)	11.50	
Internal Width Overall (in)	24 1/4"	
Internal Depth Overall (in)	28 1/4"	
Internal Height Top Usable (in)	26 7/8"	
Internal Height Bottom Usable (in)	17 7/8"	
ELECTRICAL DATA		
Full Load Amperes Refrigerator Top	2.0	
Full Load Amperes Freezer Bottom	4.0	
REFRIGERATION DATA		
Horsepower* Refrigerator Top	1/10	
Horsepower* Freezer Bottom	1/2	
Capacity (BTU/Hr)* Refrigerator Top	1110	
Capacity (BTU/Hr)* Freezer Bottom	1513	
SHIPPING DATA		
Gross Weight - Crated	446 lbs	
Height - Crated	87"	
Width - Crated	29"	
Depth - Crated	38"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Dual Temp Bottom Mount Reach-In Half-Solid Door Refrigerator /Freezer Model: HBRF23HC-1-A

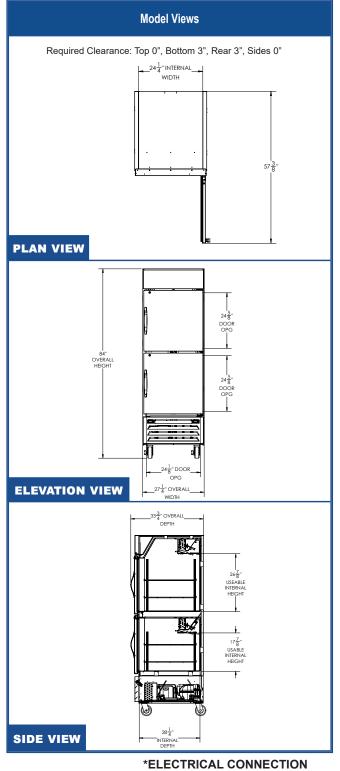

115/60/1 (2) NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.

I

c 🕕 us 🦁 🔯 🚱 🕵 🕰 🥘

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

n Ali Group Company

G R O U P The Spirit of Excellence