




# DIRECT STEAM KETTLES ON CABINET BASE

Job \_\_\_\_\_  
Item# \_\_\_\_\_

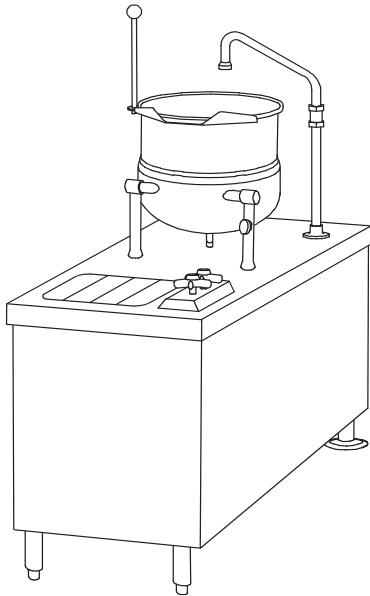

MODEL	CAPACITY
DMT-6	6 gallon (23 litre)
DMT-10	10 gallon (38 litre)

### SPECIFICATIONS:

Shall be a Crown model \_\_\_\_\_, consisting of one 6 gallon (23 litre) or one 10 gallon (38 litre) direct connected steam, tilting kettle. A double wall kettle interior shall form a steam jacket around the lower 2/3 of the kettle. The bottom of the kettle shall be of hemispherical design for superior heat circulation. The liner shall be of 316 stainless steel for high acid content products. The stainless steel mounting legs shall have the steam supply and condensate within the legs and the right leg fitted with a steam control valve for the kettle. Kettle shall be fitted with a tilt handle and heat resistant knob, allowing the kettle to be tilted forward 90° for complete emptying.

The cabinet base shall be of modular design to match other Crown cooking equipment.

The kettles mounted on a cabinet base with full perimeter angle frame, reinforced counter, hot and cold water faucet with control valves, 3" (76 mm) deep sinks with drain and splash guard, hinged door with magnetic catch, removable side panels and 6" (152 mm) stainless steel legs fitted with 4 adjustable flanged feet for securing to the floor, all #4 stainless steel exterior.

Concealed plumbing within the cabinet shall include a steam supply manifold with safety relief valve and a condensate return manifold with steam trap.

NSF listed. National Board Registered. Meets ASME code.

### OPERATION SHALL BE BY:

Direct steam at a minimum of 5 psi (34 kPa) and a maximum of 45 psi (310 kPa) 1/4 BHP required.

### STANDARD FEATURES:

- ✓ Reversible tilt handle.
- ✓ Type 316 stainless steel liner.
- ✓ Steam control valve.
- ✓ Deck mount hot and cold faucet with riser.

### OPTIONAL ITEMS AT EXTRA COST:

- Etched gallon markings (GM-).
- Etched litre markings (LM-).
- Correctional package
- Pressure reducing valve (PRV-2).
- Stainless steel back panel (SSB-24).
- Stainless steel frame (SSF-24).



### ACCESSORIES:

- One piece stainless steel lift off cover (C-).
- Lift-out perforated stainless steel basket (SSB-).
- Contoured measuring strip (CMS-).
- Ball float trap (BFT).
- Pour lip strainer (TKS-)



Models:  DMT-6  DMT-10



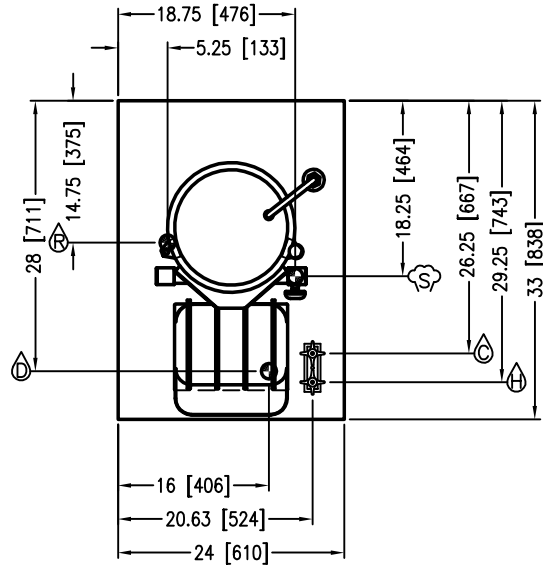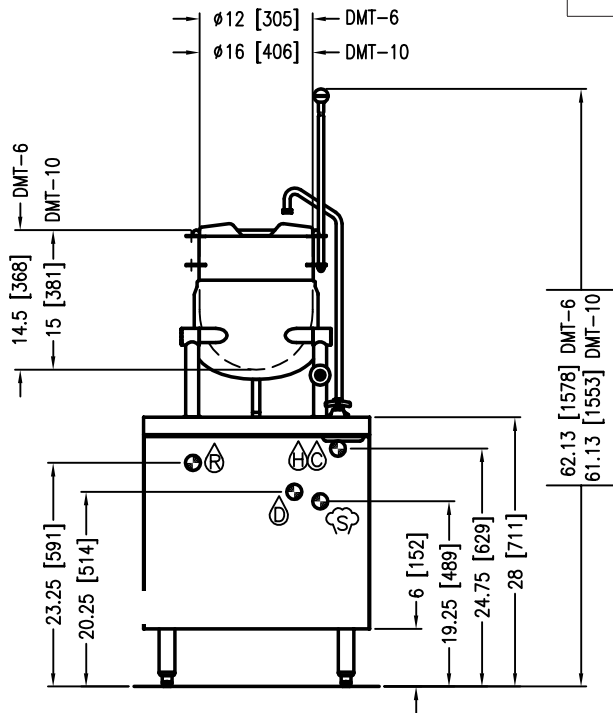


MODEL	SHIPPING WEIGHT	MIN. CLEARANCE
DMT-6	225 lbs. [102 kg.]	SIDES 0 [0 mm]
DMT-10	245 lbs. [111 kg.]	BACK 0 [0 mm]



NOTE: SPLASH GUARD NOT SHOWN IN FRONT VIEW.

IN [MM]

**SERVICE CONNECTIONS**

-  – STEAM SUPPLY: 3/4" (19 mm) IPS for incoming steam at 5-45 PSI(34-310 kPa).\*
-  – CONDENSATE RETURN: 1/2" (13 mm)
-  – COLD WATER: 3/8" (10 mm) O.D. tubing for cold water to faucet, to fill kettle.
-  – HOT WATER: 3/8" (10 mm) O.D. tubing for hot water to faucet, to fill kettle.
-  – SINK DRAIN: 1-1/8" (29 mm) O.D. tubing.

\* Pressure reducing valve is required if incoming pressure exceeds 45 PSI(310 kPa).

**INTENDED FOR COMMERCIAL USE ONLY.  
NOT FOR HOUSEHOLD USE.**



70 Oakdale Road, Toronto ON, Canada M3N 1V9  
(919) 762-1000 www.crownsteamgroup.com