



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

MOBILE AIR SCREEN

For Various Size Trays and Pans

REFRIGERATED "ASU" AND "R-AS" AIRSCREEN SERIES

Improve Workflow - AirScreen Allows Door to Be Kept Open During Tray Makeup



R-AS-10

Quick Ship Item

Hours of Continuous Open Door Use



ASU-10
4 Hours



R-AS-10
1.5 Hours

- 1** Air Screen allows for open door operation! – 3D Air Screen with multi-fan system provides the fastest cool down times and maintains cabinet temperatures of 40°F or below with the door open for up to **4 hours** on the ASU-10 and **1.5 hours** on the R-AS-10. Refrigeration System is bottom mounted and self-contained with **active defrost system**
- 2** Intuitive controls with active temperature monitoring and thermometer display are easy to use, read, and are highly accurate. Advanced Digital Controls feature **temperature set points, actual temperature indicator, clean condenser reminder** and **door open alarm** (to alert operator when door has been opened beyond allowed time span)
- 3** Unique tray slide design **holds 10 pair of trays and pans** by the bottom for greater support of heavy food items at 4.5" standard spacing **with tilt feature**. Tilt feature designed to allow cans and bottles to gently roll to front for easy access. Tray slides are removable for thorough interior cleaning
- 4** **Rear Mounted Stainless Steel Push Bar Handle, Flush Recessed Side Hand Grips** and **6" Heavy Duty Casters** are standard for ease of maneuverability in compact spaces
- 5** Full **270° Door Swing** with Door Hold Open feature for easy product access. Easier to clean with a **one piece, snap-in magnetic door gasket**.
5_a *Optional accessory Sliding Space-Saver Door* (see backside for more information) tucks compactly into side of unit maximizing service space
- 6** Energy Efficient and Environmentally Safe! – **Energy efficient condensate evaporator pan** with **plasticized evaporator fin coils** will keep your AirScreen running smoothly and efficiently! Uses **404a refrigerant** for environmentally safe operation

**Two year limited warranty*



3D AirScreen System



Tilt-Capable Tray Slides



Rear Mounted Stainless Steel Push Bar Handle



Optional Sliding Space Saving Door




COMPLIANT 10 CFR 431.66

made to serve you better



PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

SPECIFICATIONS: MOBILE AIR SCREEN

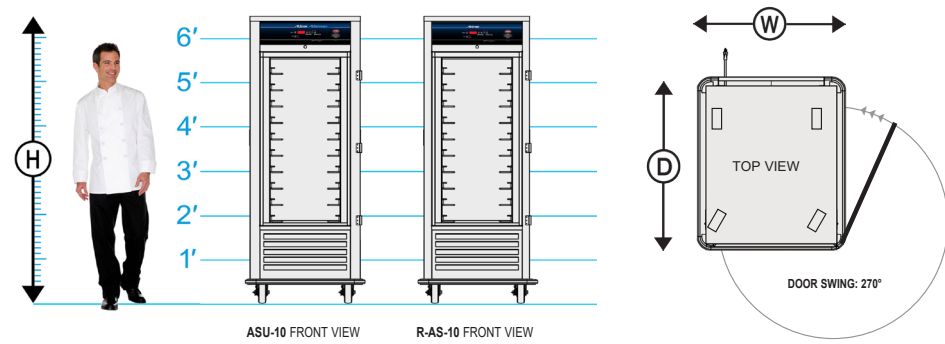


ELECTRICAL DATA ASU-10 / R-AS-10		ELECTRICAL DATA ASU-10 / R-AS-10 INTERNATIONAL ONLY	
VOLTS	120	VOLTS	220-240
WATTS	780	WATTS	1357
AMPS	6.5	AMPS	5.9
HERTZ	60	HERTZ	50/60
PHASE	Single	PHASE	Single
PLUG USA	5-15P	PLUG CANADA*	6-15P
PLUG CANADA	5-15P		

*Consult factory for additional plugs for international use

		DIMENSIONS IN. (mm)			CLASS 150		
		(Includes Casters & Bumper)					
MODEL NUMBER	NON - ADJUSTABLE SLIDES: 4.5" (114 mm) Spacings are Standard	HIGH "H"	DEEP "D"	WIDE "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
ASU-10	10 TRAYS 18"X 26"	78.75"	38.75"	32.75"	1	6"	587 (266)
	20 TRAYS 14"X 18"	(2000)	(985)	(832)			
R-AS-10	10 TRAYS 18"X 26"	78.75"	37.5"	32"	1	6"	580 (263)
	20 TRAYS 14"X 18"	(2000)	(952)	(813)			



Note: Door hinging is right as standard. Door may be ordered as left hand hinging at time of order at no charge. Door is not field reversible.

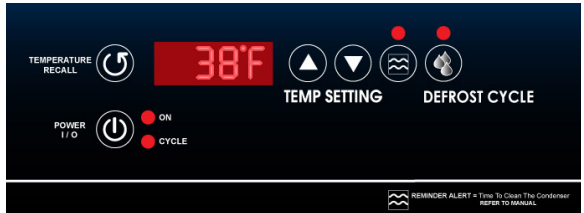

ASU-10 / R-AS-10 Controls

Optional Accessory
Sliding Space-Saver Door
 tucks compactly into side of unit maximizing service space



Door Closed Door Open 90° Door Nested

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean covered corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing stressplates at corners.
INSULATION. High efficiency insulation throughout cabinet and door.
HANDLES. Form grip flush-in-wall antimicrobial hand grips recess mounted on each side of unit and one rear mounted tubular handle.
DOORS AND LATCHES. Flush mounted, stainless steel insulated doors shall be gasket sealed. Each door shall have three (3) heavy-duty, 12 gauge stainless steel hinges and a magnetic work flow door handle. The hinge mountings are reinforced with stainless steel backing plates
BUMPER. Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame, with snap-in, non-marking replaceable vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous with corner cut-outs to facilitate cleaning.
CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Casters shall have a reinforced yoke mounted to

10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.
TRAY SLIDES. Secure bottom tray support with tilt mount feature, removable for cleaning. Tray slides are polymer coated, tested and approved to meet the NSF International Corrosion Resistance requirements under NSF Std 51/ ASTM b117 Sections 6.2 and 6.2.1.
AIRSCREEN SYSTEM / CONTROLS. A 1/2 HP Hi-torque condensing unit, air-cooled closed system assures optimum performance in high ambient room temperatures. It has a 3 pound receiver charged with environmentally safe non-CFC 404A refrigerant. A thermal expansion valve (for pressure control) also a filter dryer. A high CFM multi-fan design, oversized coated evaporator coil to pressure/displacement curtain of air. A unique air circulation pattern within the food zone, for during periods while door is open it will maintain proper temperatures. Controls shall include an easy to read digital display for cabinet temperature (with recall capability of temperature set point and actual cabinet temperature). Easy to read master ON/OFF button with power indicator light, cooling cycle indicator light, maximum allowed time* † with door open warning and automatic shutdown, clean condenser reminder light, on-demand

defrost with a defrost cycle indicator light. Defrost element shall be 750 Watts. Adjustable temperature range from 33°F to 38°F (6°C to 3.3°C) factory preset temperature is 38°F (3.3°C). Minimum full load circuit requirement 15 amp. See electrical data chart above for running amps.
 *ASU-10 model has a maximum allowable 240 minute door open before operator warning and automatic shutdown.
 *R-AS-10 model has a maximum allowable 90 minute door open before operator warning and automatic shutdown.
 † Environmental conditions such as humidity will affect maximum allowable door open operation.
COMPRESSOR / SIZE. Air-cooled 1/2 HP condenser assures optimum performance in high ambient room temperatures.
ELECTRICAL CHARACTERISTICS. 3 wire grounded power cord and plug, rear mounted for safety.
INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present. Refer to operations manual for further details.

- OPTIONAL ACCESSORIES**
- ELECTRIC**
 - 220 volt - International only, 50 or 60Hz, single phase
 - DOORS**
 - Space-saver sliding door
 - Key locking door latch
 - Padlocking transport latch
 - Left hand door hinging
 - Glass door
 - CASTERS**
 - All swivel or larger casters
 - Floorlock (requires 6" casters)
 - 6" legs
 - EXTRAS**
 - Security packages
 - Menu card holder
 - Cord winding bracket
 - Top corner bumpers
 - Stainless steel slides

FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991.
 All rights reserved. All specifications subject to change without notice.
 Errors subject to correction. © 19 Food Warming Equipment Company, Inc. R.19.01



FOOD WARMING EQUIPMENT COMPANY, INC.
 5599 HWY. 31 W. Portland, TN 37148
 815.459.7500 | Fax: 815.459.7989 | sales@fwe.com

800-222-4393
www.FWE.com

