

PROJECT:		
ITEM #	QTY:	
MODEL #		
AIA #	SIS #	

RIGERATOR WITH DRAWERS

# **UNDERCOUNTER REFRIGERATOR WITH DRAWERS**

VURD27HC-2



REFRIGERATION

36°F to 38°F

All Environmental Concerns

**Epoxy Coated Evaporator Coil** 

Rear Mounted Refrigeration System

Consistent Product Temperatures











## **CABINET CONSTRUCTION**

- Stainless Steel Exterior (galvanized back and bottom)
- Aluminum Interior
- Stainless Steel 20 Gauge Drawers
- · One Piece, Snap-In Magnetic Drawer Gaskets
- · 6" Casters Two With Brakes
- · 8' Cord And Plug (see electrical data for details)

### **FEATURES**

- Full Electronic Control
- · Stay-Open Door Feature For Easy Product Loading
- · Low Profile Horizontal Drawer Handles
- · Heavy-Duty Pan Supports Provided
- Drawers Accommodate 6" Deep Full Size Food Service Pans In Both Upper And Lower Drawers (pans not included)
- · Telescoping Drawer Slides With Locking Mechanism
- 3 Year Parts & Labor Warranty
  - Plus An Additional 4 Year Compressor Warranty
- Exclusive 2 Year Warranty On Magnetic Drawer Gaskets
- Lifetime Warranty On Handles & Hinges (Parts Only)

Refrigeration System Uses R-290 Refrigerant To Comply With

Adaptive Defrost For Reduced Energy Consumption And More

Refrigerator Capable Of Maintaining Product Temperature

Please verify qualifying units by visiting: www.energystar.gov/cfs


## **OPTIONS & ACCESSORIES**

- · Stainless Steel Interior
- · Stainless Steel Back
- · Secure-Temp™ Technology
- · Cutting Board
- · Drawer Locks
- 6" Legs or 6" Seismic Legs
- · Casters: 3", Roller Kit, Low Profile
- Remote Models\* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 | fax: (800) 253-5168 

Rev 3/17/20 Printed in U.S.A. APPROVAL: \_\_\_ \_\_ DATE: \_\_



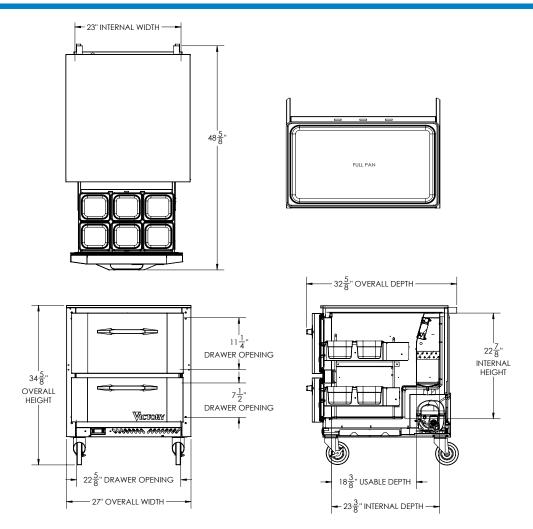

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity	6.15	Cabinet Voltage	115/60/1	Height	34"
Width, Overall (in.)	27"	Total Amperes	2.0	Width	30"
Depth, Overall (with handle)	32 5/8"	NEMA Plug*	5-15P	Depth	32"
Height Overall (6" casters)	34 5/8"	REFRIGERATION DATA		Crated Weight	203 lbs
Depth, Drawer Open 90°	48 5/8"	Condensing Unit Size, HP*	1/10	*NOTE: Remote units are field wired and comes with 6' legs. Refrigerant must be specified at time of order.	
Drawer Openings (in.)	22 5/8" × 11 1/4" 22 5/8" × 7 1/2"	Refrigerant*	R-290		
No. Of Drawers	2	Capacity (BTU/HR) (100°F/20°F)	1110		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Rev. 3/17/20 Printed in U.S.A.

