



# TRAY LINE HEATED HOLDING CABINETS

Wet Serving Wells & Heated Compartments for 12"x 20" Pans, 18"x 13" Trays, & GN 1/1 Containers

RADIANT "HLC-W-DRN" SERIES

**Heavy-duty, mobile server with wet wells take the food whenever and wherever you need it to go**

**1** Wet wells warm your food with the most uniform, gentle heat possible. Provided with built-in drain system with access to external shut-off valve

**2** Heated compartments keep refills close at hand, providing soft, radiant, uniform heat that gently surrounds food to provide a better appearance, taste, and longer holding time

**3** Each well and heated compartment is controlled separately for added versatility to accommodate any menu

**4** Made for mobile applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport

**5** HLC-W-DRN series accommodates shallow and deep 12" x 20" pans, 18" x 13" trays and GN 1/1 containers. Unique pan slide racks' front edges are relieved for easy loading, one piece die stamped stainless steel for extra strength, and removable for easy cleaning

**6** Magnetic work flow door handle - magnetic operation eliminates the need for latch hardware and provides a cleaner look. Save time and money on replacement parts and maintenance fees; with no moving parts to bind or wear out!

**7** Customize with versatile service line optional accessories, such as a sneeze guard and tray slide shelf



**HLC-3W6-7H-21-DRN**

(Shown With Optional Accessories Sneeze Guard and Tray Slide Shelf)

**\*Two year limited warranty**



Separately Controlled Wells



Separately Controlled Compartments



Work Flow Handle




Optional Sneeze Guard & Tray Slide Shelf



**((RADIANT HEAT))**

# SPECIFICATIONS

# TRAY LINE HEATED HOLDING CABINETS

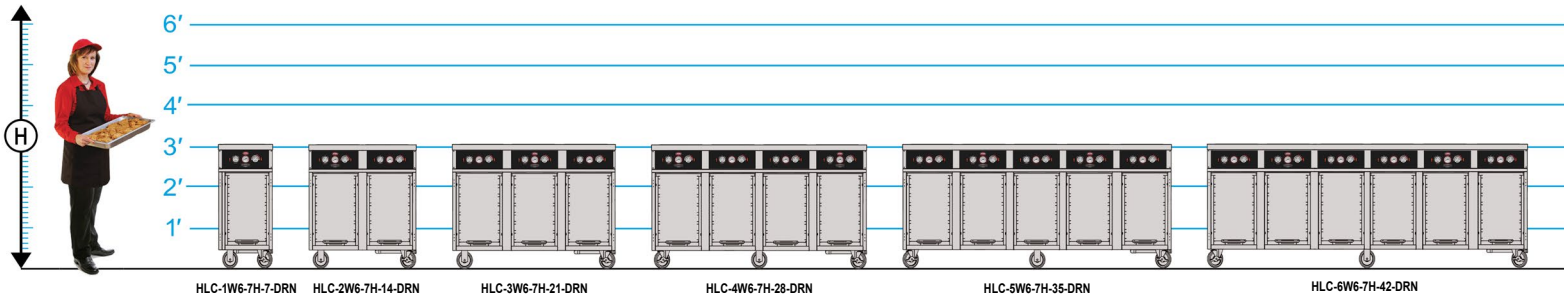

HLC-1W6-7H-7-DRN    HLC-2W6-7H-14-DRN    HLC-3W6-7H-21-DRN    HLC-4W6-7H-28-DRN    HLC-5W6-7H-35-DRN    HLC-6W6-7H-42-DRN

MODEL NUMBER	DEPTH OF WELL	NO. OF WELLS	CAPACITIES OF 12" x 20" or GN 1/1 PANS [A]						OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			CLASS 100		
			2.625" FIXED SPACINGS			66.7mm FIXED SPACINGS			HIGH "H"	DEEP "D"	WIDTH "W"	NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
			DEPTH 12" x 20" PANS			DEPTH GN 1/1 PANS								
			2.5"	4"	6"	65mm	100mm	150mm						
HLC-1W6-7H-7-DRN	6.5" (165)	1	7	3 <sub>[B]</sub>	2 <sub>[B]</sub>	7	3 <sub>[B]</sub>	2 <sub>[B]</sub>	37.25 (946)	27.5" (698)	17" (432)	1	5"	190 (86)
HLC-2W6-7H-14-DRN	6.5" (165)	2	14	6 <sub>[B]</sub>	4 <sub>[B]</sub>	14	6 <sub>[B]</sub>	4 <sub>[B]</sub>	37.25 (946)	27.5" (698)	35" (889)	2	5"	280 (127)
HLC-3W6-7H-21-DRN	6.5" (165)	3	21	9 <sub>[B]</sub>	6 <sub>[B]</sub>	21	9 <sub>[B]</sub>	6 <sub>[B]</sub>	37.25 (946)	27.5" (698)	51.5" (1308)	3	5"	440 (200)
HLC-4W6-7H-28-DRN	6.5" (165)	4	28	12 <sub>[B]</sub>	8 <sub>[B]</sub>	28	12 <sub>[B]</sub>	8 <sub>[B]</sub>	37.25 (946)	27.5" (698)	68.75" (1746)	4	5"	615 (279)
HLC-5W6-7H-35-DRN	6.5" (165)	5	35	15 <sub>[B]</sub>	10 <sub>[B]</sub>	35	15 <sub>[B]</sub>	10 <sub>[B]</sub>	37.25 (946)	27.5" (698)	86" (2184)	5	5"	750 (340)
HLC-6W6-7H-42-DRN	6.5" (165)	6	42	18 <sub>[B]</sub>	12 <sub>[B]</sub>	42	18 <sub>[B]</sub>	12 <sub>[B]</sub>	37.25 (946)	27.5" (698)	103.25" (2623)	6	5"	850 (386)

[A] Combinations of deep and shallow pans may be used with varying capacities. Also accommodates one (1) 18" x 13" x 1.5" tray per set of slides.

[B] Custom pan spacings are available to increase the capacity of the deeper pans: 12" x 20" x 4", 12" x 20" x 6", and GN 1/1 containers.

Custom Configurations are available to vary number of heated and ambient sections. Consult factory.

ELECTRICAL DATA				
Model No.	HLC-1W6-7H-7-DRN	HLC-2W6-7H-14-DRN		
VOLTS	120	220-240	120	220-240
WATTS	1100	1190	2000	2380
AMPS	8.3	5	16.7	9.9
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA	5-15P	6-15P	5-20P*	6-15P
PLUG CANADA	5-15P	6-15P	5-30P	6-15P
Model No.	HLC-3W6-7H-21-DRN	HLC-4W6-7H-28-DRN	HLC-5W6-7H-35-DRN	HLC-6W6-7H-42-DRN
VOLTS	220-240	220-240	220-240	220-240
WATTS	3570	4760	5950	7140
AMPS	14.9	19.8	24.8	29.8
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA	6-15P*	6-20P*	6-30P*	6-30P*
PLUG CANADA	6-20P	6-30P	6-50P	6-50P

\*Dedicated Circuit.

**CONSTRUCTION.** Heliarc welded, single unit construction of stainless steel; 18 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean coved corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing stress plates at corners.  
**INSULATION.** "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides and door(s).  
**DOORS AND LATCHES.** Flush mounted, stainless steel doors shall have 1" thick fiberglass insulation. High temperature door gasket mounted on cabinet. Each door shall be equipped with a horizontal magnetic work flow handle. Each door shall have two (2) heavy-duty edgemount die cast hinges.

**CASTERS.** Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. HLC-4W6-7H-28-DRN, HLC-5W6-7H-35-DRN and HLC-6W6-7H-42-DRN shall have a six caster configuration with two (2) rigid and four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge castor plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.  
**PAN SLIDES.** Stainless steel racks shall be one piece die stamped channel-type pan slides at 2.625" (66.7 mm) spacings to accommodate either deep or shallow

12" x 20" or GN 1/1 pans (at varying capacities - see chart). Racks are removable without tools for cleaning. Racks shall lift off of heavy-duty stainless steel supports.  
**HEATED COMPARTMENTS.** Radiant heat system shall include an incoloy nickel-chromium alloy heating element. Controls shall be up-front, recessed and shall include a full range thermostat adjustable to actual temperature. Thermostat shall include temperature scale marked in ten degree increments (F/C) from 90° to 190°F (32° to 88°C). An operational range thermometer, power supply light and thermostat cycling light are also included.  
**TOP MOUNT SERVING WELLS.** Each well shall be one piece stainless steel, deep drawn with coved corners. Each well shall have ridge around top perimeter. Each insulated,

individually thermo wrapped well shall have a separate adjustable thermostat and indicating light. Top well depth of 6.5" (165mm) is designed to be used wet. Accommodates up to a 12" x 20" x 6" or a GN 1/1.  
**DRAIN.** Each heated well connects to built-in drain system with easy access external 3/4" solder joint shut-off valve.  
**ELECTRICAL CHARACTERISTICS.** 3 wire grounded power cord and plug. See electrical data chart above for amperage and receptacle configuration. See electrical chart for models that require a dedicated circuit.  
**INSTALLATION.** Unit should not be installed in an area where adverse environmental conditions are present.

## OPTIONAL ACCESSORIES

- ELECTRIC**
- 220 volt, 50/60 Hz, single phase
  - DOORS**
  - Key locking door latch
  - Padlocking transport latch
  - SPACINGS**
  - Custom pan slide spacing
  - CASTERS**
  - All swivel or larger casters
  - Master casters
  - EXTRAS**
  - Security packages
  - Full extension bumper
  - Tubular handles
  - Corner bumpers
  - Drop down side shelf
  - 12" drop down tray slide shelf (customer side)
  - 8" drop down stainless steel cutting board (operator side)
  - 8" drop down maple cutting board (operator side)
  - Poly mounted to stainless steel cutting board
  - Sneeze guard
  - Cord winding bracket
  - Humidity pan
  - Custom cord location
  - Thermal Barrier wall for heated/ambient configurations (not available on single door models)