

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

## COUNTERTOP MERCHANDISERS 4-SIDED GLASS | REFRIGERATORS

Model:  MECR-31D 1 Door  MECR-32D 2 Door Pass Through



MECR-31D  
1 Door



MECR-32D  
2 Door Pass Through

4-Sided countertop clear glass door merchandisers are designed for durability and visual appeal in promoting impulse sales of your product. These glass door merchandisers are energy efficient and effective at keeping product at exactly the right temperature. This keeps food fresh & delicious for longer time periods. The simple-to-use but precise digital controls allows for accurate temperature settings and regulation. Unit comes with an internal condensate evaporator so a floor drain connection is not necessary.

### FEATURES

- Dual pane tempered glass doors and sides enhance energy efficiency by preventing heat loss and minimizing condensation
- Interior LED lighting
- Internal hidden bottom mounted compressor with flow through ventilation to cool the utility compartment
- Manual defrost cycle maintains ideal storage conditions if frost build-up ever becomes an issue
- Internal condensate evaporate pan included. No drain connection is needed.
- Comes with all needed approvals for commercial retailers.
- Single or pass through twin door models available to suit your specific site layout requirements
- Flat top accommodates POP or other marketing support concepts
- 3 heavy-duty, adjustable chrome-plated wire shelves are provided
- Use of R-290 as the system refrigerant delivers energy savings and presents no environmental risks as it's Global Warming Potential value of 3 is unsurpassed by any other current commercial alternatives
- Appliance size and height is adjustable for placing the unit on the floor or counter top
- Unit conforms to 2017 DOE requirements

### TEMPERATURE

- Holding temperature: 34° to 54°F (1° to 12°C)
- Digitally controlled system maintains optimum temperature
- This unit is designed to store pre-chilled product at the ideal serving temperature – it is not intended to perform as a pull down refrigerator
- Digital control scheme enables easy adjustment and delivers precise internal compartment temperature regulation
- Temperature can be displayed in Celsius or Fahrenheit

### CONSTRUCTION

- Exterior Material: Durable, corrosion resistant black painted steel, black plastic trim, stainless steel base panels
- Interior Material: ABS, an easy to clean, low maintenance surface
- Energy efficient R-290 condensing unit for excellent temperature regulation
- 2" legs (two front adjustable leveling legs)

### REFRIGERANT

- Environmentally-friendly R-290 propane which occurs naturally with a GWP value of 3

### ELECTRIC

110/60Hz/1 Ph (NEMA 5-15)  
 Cord set includes plug & 6' (3m) cord

1.27" / 32 mm



NEMA 5-15P



Intertek  
 Certified to  
 ANSI-NSF 7



Certified to  
 ANSI UL 471



DOE 2017  
 Compliant

### Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts  
 One (1) year on-site labor  
 Four additional (4) years compressor (part only)  
 Administered by The Legacy Companies, 877.368.2797  
 24/7 tech support provided


Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.


The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

## COUNTERTOP MERCHANDISERS 4-SIDED GLASS | REFRIGERATORS

MECR-31D – 1 Door Unit  
Single Sided Service

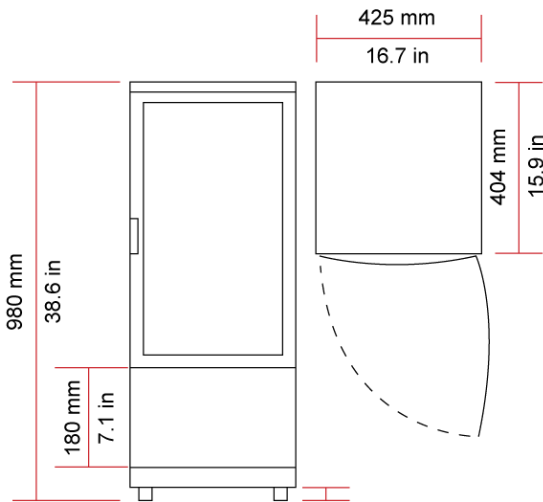

MECR-32D – 2 Door Unit  
Pass Through Service

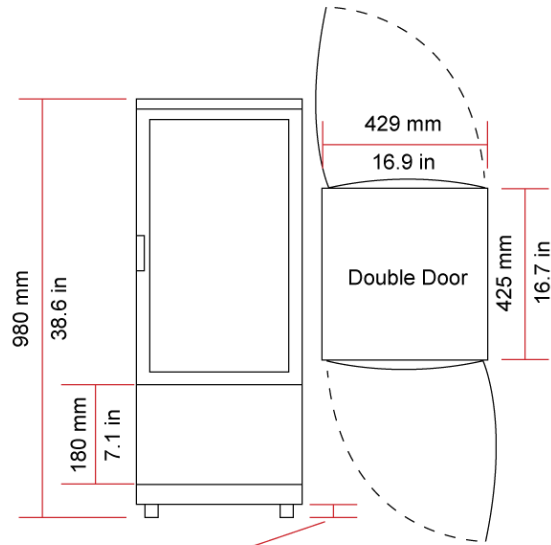

38 mm  
1.5 in  
Countertop / Floor Use

Optional 6" leveling legs set is available for floor mounted applications

	MECR-31D	MECR-32D
<b>In: External Dimensions W x D X H</b>	16.7 x 15.9 x 38.6	16.9 x 16.7 x 38.6
<b>mm: External Dimensions W x D X H</b>	425 x 404 x 980	429 x 425 x 980
<b>Nominal Capacity</b>	3 Cu Ft / 85 L	3 Cu Ft / 85 L
<b>Actual Storage Capacity</b>	2.89 Cu Ft / 82 L	3.03 Cu Ft / 86 L
<b>Doors</b>	1	2
<b>Shelves</b>	(3) shelves	(3) shelves
<b>Unit Weight</b>	79.4 lb / 36 kg	80.5 lb / 36.5 kg
<b>Shipping Weight</b>	84.9 lb / 38.5 kg	86 lb / 39 kg
<b>Shipping Dimensions (mm)</b>	480 x 450 x 1035	480 x 480 x 1035
<b>Watt Rating</b>	180 W	164 W
<b>Refrigerant</b>	R-290	R-290
<b>Refrigerant Charge Size</b>	1.41 ounces (40g)	1.41 ounces (40g)

Recommended minimal side clearance for each door is 18". For closed sides, recommended clearance is 3".

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.