




Tag: **GI-K** \_\_\_\_\_

## Large Capacity Grease Interceptor

**SPECIFICATION:** Watts Drainage GI-K Series recessed or floor mounted epoxy coated steel grease interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt(s), double wall deep seal trap, integral stainless steel flow control plate, and no hub (standard) connections.

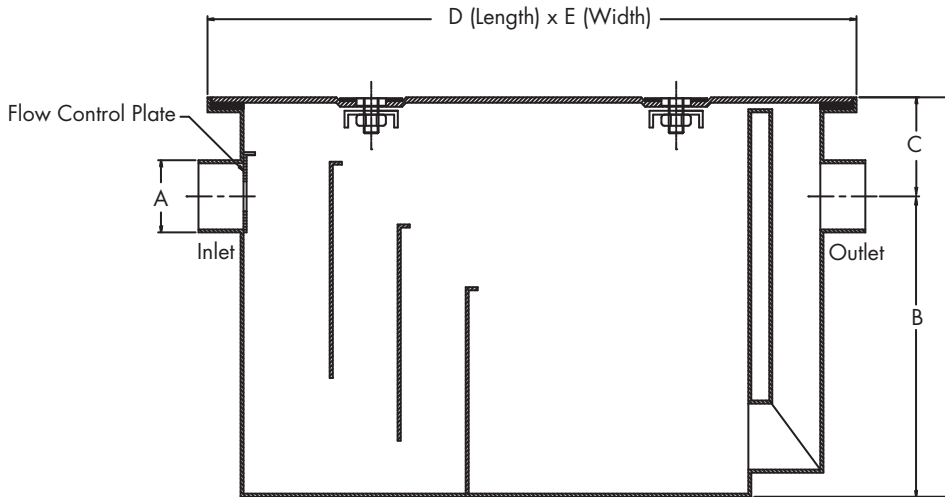

Flow Rate (Select One)		
Suffix	Description	
75	75 GPM	<input type="checkbox"/>
100	100 GPM	<input type="checkbox"/>
150	150 GPM	<input type="checkbox"/>
200	200 GPM	<input type="checkbox"/>
250	250 GPM	<input type="checkbox"/>
300	300 GPM	<input type="checkbox"/>
400	400 GPM	<input type="checkbox"/>
500	500 GPM	<input type="checkbox"/>

Options (Select One or More)		
Suffix	Description	
-B	Sediment Bucket	<input type="checkbox"/>
-E	Extension	<input type="checkbox"/>
-FC	Flange & Clamp Device	<input type="checkbox"/>
-HD	Heavy Duty (10,000 lb.) Traffic Cover	<input type="checkbox"/>
-O	Inlet & Outlet other than Standard Size	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>
-THD	Threaded Connections	<input type="checkbox"/>
-US	Buy American Compliant	<input type="checkbox"/>

Interceptor Catalog Number	Flow Rate GPM	Grease Capacity Lbs	A	B	C	D	E	F
			Inlet & Outlet	Base to Center	Top to Center	Length	Width	Height
GI-75-K	75	150	4"(102)	18-1/2"(470)	4-1/2"(114)	39-3/4"(1010)	30-3/4"(781)	23"(584)
GI-100-K	100	200	4"(102)	28-1/2"(724)	4-1/2"(114)	39-3/4"(1010)	30-3/4"(781)	33"(838)
GI-150-K	150	300	4"(102)	38-1/2"(978)	4-1/2"(114)	39-3/4"(1010)	30-3/4"(781)	43"(1092)
GI-200-K	200	400	4"(102)	36-1/2"(927)	6-1/2"(165)	52"(1321)	34"(864)	43"(1092)
GI-250-K	250	500	4"(102)	39-1/2"(1003)	6-1/2"(165)	52"(1321)	34"(864)	46"(1168)
GI-300-K	300	600	6"(152)	38"(965)	10"(254)	76"(1930)	48"(1219)	48"(1219)
GI-400-K	400	800	6"(152)	42"(1067)	10"(254)	83"(2108)	55"(1397)	52"(1321)
GI-500-K	500	1000	6"(152)	53"(1346)	10"(254)	91"(2311)	60"(1524)	63"(1600)

Job Name \_\_\_\_\_ Contractor \_\_\_\_\_

Job Location \_\_\_\_\_ Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_ Representative \_\_\_\_\_

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com