

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

PH REACH-IN WARMING CABINET

MODEL: PH2-1HS-PT

PH2 Half-Solid Double Door Pass Thru Warming Cabinet



PH2-1HS-PT

OPTIONS & ACCESSORIES

- Pan slides
- 3" or 6" Casters

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior
- Interior liner is made of corrosion resistant aluminum
- Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80°F to 180°F
- Manually controlled humidity vents are provided in the top of the cabinet
- Self closing doors with safety stops
- Heavy-duty cylinder lock and self-adjusting magnetic gasket
- Stainless steel breaker
- Cam-lift hinges
- Three (3) silver freeze shelves
- 6" Adjustable legs standard

ELECTRICAL SYSTEM

- 20 AMP breaker required for double door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment.
- Externally mounted blower system maintains even temperature through out the food zone area.
















MODEL	PH2-1HS-PT	
EXTERNAL DIMENSIONAL DATA		
Width Overall	52 1/8"	
Depth Overall with Handle	38 3/8"	
Height Overall	83 3/4"	
Number of Doors	8	
Depth with Door Open 90°	84 1/4"	
Door Opening (in)	21 1/2" x 25 1/4"	
INTERNAL DIMENSIONAL DATA	INTERNAL DIMENSIONAL	
NET Capacity (cubic ft.)	43.3	
Internal Width Overall (in)	48 1/8"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	56 5/8"	
Number of Shelves	6	
ELECTRICAL DATA		
Cabinet Voltage 208-240/60/1	208-240/60/1	
Max. Fuse Size T.D.	20 AMPS	
Feed Wires	2	
Heater Watts per section (@240V)	1500	
Total Wattage (Heaters & Fan @240V)	3000	
Total AMPS	13.00	
WEIGHT DATA		
Gross Weight (Crated lbs)	509 lbs	
Height - Crated	88"	
Width - Crated	60"	
Depth - Crated	45"	

Warming Cabinet Model: PH2-1HS-PT

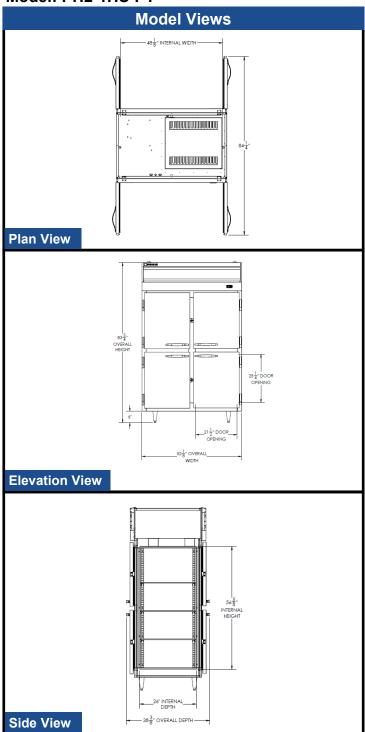

ELECTRICAL CONNECTION



Units pre-wired at factory and include 8' long cord and plug set.











