

PROJECT:	
ITEM #	
MODEL #	
· IODLL // .	

Stay-Open Door Feature For Easy Product Loading Heavy-Duty 20 Gauge Stainless Steel Door

Energy Saving Thermal Breaker With Stainless Steel

8' Cord And Plug (see electrical data for details)

Full Electronic Control With Touchpoint Interface

Anti-Condensate Door Perimeter Heaters

Accepts Cart: 26 1/2"W x 29"D x 72"H (cart not included)

High Performance, Balanced, Top-Mounted Refrigeration

Refrigeration System Uses R-290 Refrigerant To Comply With

Adaptive Defrost For Reduced Energy Consumption And More

Epoxy Coated Evaporator Coil, Located Out Of The Food Zone

Please verify qualifying units by visiting:

www.energystar.gov/cfs

Freezer Capable Of Maintaining Product Temperature -10°F

One-Piece, Snap-In Magnetic Door Gasket

AIA # _

____ QTY: _

CABINET CONSTRUCTION Stainless Steel Exterior And Interior

Heavy-Duty Cam Hinges

Heavy-Duty Cylinder Lock Steel Interior Door Liner Adjustable Door Wiper Gasket

Hinged Front Shroud

Breaker Caps

FEATURES

Low Profile Vertical Door Handle

Expansion Valve Technology

Manager's Lockout Feature

All Environmental Concerns Hot Gas Condensate Evaporator

Consistent Product Temperatures

One Touch Defrost

REFRIGERATION

SIS #

PASS-THRU EXTRA TALL FREEZER

FIS-1D-S1-PT-XH-HC





- **3 Year Parts & Labor Warranty** Plus An Additional 4 Year Compressor Warranty Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (Parts Only)

OPTIONS & ACCESSORIES

- Secure-Temp[™] Technology
- Stainless Steel Back
- Stainless Steel Exterior Floor (base)
- Exterior Laminate
- FlexTemp Maintain Between 0°F And• 20°F
- Door Swing Orientation (at time of order)
- · Correctional Facilities Option


SS-THRU EXTRA TALL FREEZ

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com

APPROVAL: _____ DATE: _____



FIS-1D-S1-PT-XH-HC

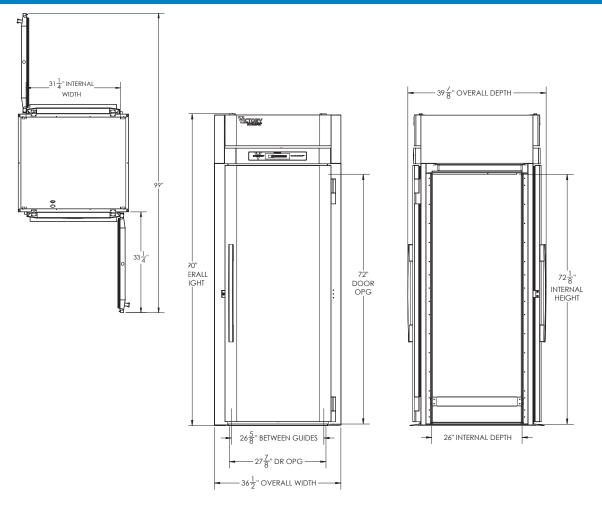

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft)	42.27	Cabinet Voltage	115/60/1	Height	95″
Width, Overall (in.)	36 1/2"	Total Amperes	10.5	Width	51″
Depth, Overall (with handle)	39 7/8″	NEMA Plug* (8' cord)	5-15P	Depth	48″
Height Overall	90″	REFRIGERATION DATA		Created Weight	448 lbs
Depth, Door Open 90°	99″	Condensing Unit Size, HP*	3/4+		
Door Opening (in.)	27 7/8" x 72"	Refrigerant*	R-290		
No. Of Doors	2	Capacity (BTU/HR) (100°F/20°F)	2580		

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 6/3/20 Printed in U.S.A.

an Ali Group Company

