

Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle QuadPLUS®, model Consists of (1) Standard truss frame with louvered QuadPLUS® green shelf mats; (3) Quad-Adjust® truss frames with louvered QuadPLUS® green shelf mats; (1) Standard truss frame with solid QuadPLUS® green shelf mats; and (4) 74" (1880mm) posts. Mobile units feature 5" (127mm) resilient swivel stem casters—two with brake.

	Q.800
	1. C. M.
The Control of the Co	
1	

QuadPLUS® stationary starter unit

Options / Accessories

- □ Dividers
- Wire Baskets

Item No.: Project No.: S.I.S. No.:

QuadPLUS® 5-Tier Starter Units

MODELS:

- □ *QPMU18*C-G5-74* □ QPSU18*C-G5-74 □ OPMU21*C-G5-74 □ OPSU24*C-G5-74 □ *QPMU24*C-G5-74* □ QPSU21*C-G5-74 ☐ QPSU18*V-G5-74 ☐ *QPMU18*V-G5-74* ☐ QPSU24*V-G5-74 ☐ *QPMU21*V-G5-74* ☐ QPSU21*V-G5-74 ☐ *QPMU24*V-G5-74*
- * See charts below for complete model numbers.

Features

- (1) Standard truss frame with louvered QuadPLUS® green shelf mats.
- (3) Quad-Adjust® truss frames with louvered QuadPLUS® green shelf mats.
- (1) Standard truss frame with solid QuadPLUS® green shelf mats.
- (4) 74" (1880mm) posts.
- Stationary and mobile units available. Mobile units feature 5" (127mm) resilient swivel stem casters—two with brake.
- Mats lay securely on top of truss frame or on top of an existing standard wire shelf.
- Truss frames and shelves adjustable at 1" increments to accommodate many applications.
- Injection-molded polypropylene mats feature MICROGARD® antimicrobial protection against bacteria, mold and mildew.
- Easy cleaning, dishwasher-safe.
- Truss frames coated with EAGLEgard® green epoxy or Valu-Gard® green epoxy finish.
- Set of four split sleeves (included with each truss frame) snap onto Eagle's 1"-diameter posts.
- Temperature rating: Up to 200°F* for intermittent exposure to cleaning, such as in a dishwasher.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division. Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: guotes@eaglegrp.com

Certifications / Approvals






EG01.36 Rev. 12/15


^{*} Temperature rating of -20°F to 120°F under continuous use.



Item No.: .	
Project No.: .	
S.I.S. No.: .	

QuadPLUS® 5-Tier Starter Units

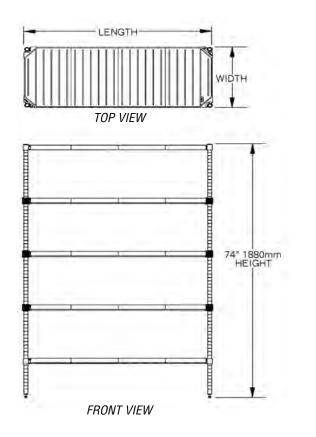

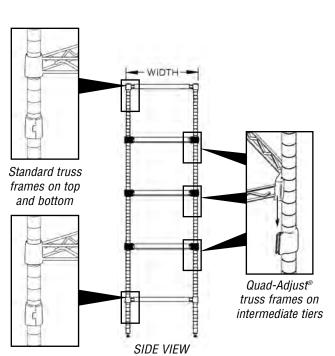

(stationary shelf unit shown)

	with EAGLEgard® green epoxy		with Valu-Gard® green epoxy	
width x length	STATIONARY	MOBILE	STATIONARY	MOBILE
in. mm	model #	model #	model #	model #
18" x 36" 457 x 914	QPSU1836E-G5-74	QPMU1836E-G5-74	QPSU1836VG-G5-74	QPMU1836VG-G5-74
18" x 48" 457 x 1219	QPSU1848E-G5-74	QPMU1848E-G5-74	QPSU1848VG-G5-74	QPMU1848VG-G5-74
18" x 60" 457 x 1524	QPSU1860E-G5-74	QPMU1860E-G5-74	QPSU1860VG-G5-74	QPMU1860VG-G5-74
21" x 36" 533 x 914	QPSU2136E-G5-74	QPMU2136E-G5-74	QPSU2136VG-G5-74	QPMU2136VG-G5-74
21" x 48" 533 x 1219	QPSU2148E-G5-74	QPMU2148E-G5-74	QPSU2148VG-G5-74	QPMU2148VG-G5-74
21" x 60" 533 x 1524	QPSU2160E-G5-74	QPMU2160E-G5-74	QPSU2160VG-G5-74	QPMU2160VG-G5-74
24" x 36" 610 x 914	QPSU2436E-G5-74	QPMU2436E-G5-74	QPSU2436VG-G5-74	QPMU2436VG-G5-74
24" x 48" 610 x 1219	QPSU2448E-G5-74	QPMU2448E-G5-74	QPSU2448VG-G5-74	QPMU2448VG-G5-74
24" x 60" 610 x 1524	QPSU2460E-G5-74	QPMU2460E-G5-74	QPSU2460VG-G5-74	QPMU2460VG-G5-74

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065 • www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A. ©2015 by Eagle Group

Rev. 12/15