

|                |           |
|----------------|-----------|
| PROJECT:       |           |
| MODEL #:       |           |
| ITEM #:        | QTY:      |
| AVAILABLE W/H: | APPROVAL: |

## Sandwich Prep Tables



## STANDARD FEATURES

### Cabinet construction

- Stainless steel cabinet construction  
Stainless steel interior and exterior (galvanized steel back & bottom).
- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly
- Drop-in section:  
Fans force cold air into this enclosed area keeping stored food items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage into the storage area beneath
- Standard 1/6 / 4" food pans are provided.  
Unit accommodates 6" deep pans
- Epoxy coated wire shelves with adjustable shelving height.
- Side rail cutting board bracket with 9 1/2" deep, 1/2" thick cutting board included
- Four (4) 4" diameter swivel casters with front brakes standard.

### Refrigeration

- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.
- Self-contained system, rear mounted compressor.
- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Refrigerators have a temperature range between 33°F ~ 39°F

### Doors

- Self closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)

### Design

- Self-diagnostic digital temperature control & monitor system  
Digital display allows for easy monitoring  
Digital controls include automatic evaporator fan motor delay.
- Rounded corner design gives a stylish appearance and reduces chances of injury.
- Visual and audible door open alarm, alarm sounds when doors are not completely closed to protect against food spoilage
- Standard NSF/ANSI Standard 7 compliant

### Connection

- 9 ft long flexible three wire cord with molded plug


### Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable feet available
- Additional shelves are available.
- Drawer models available
- 6" pans available


# Sandwich Prep Tables

## PRODUCT PLAN VIEW

- Top View -

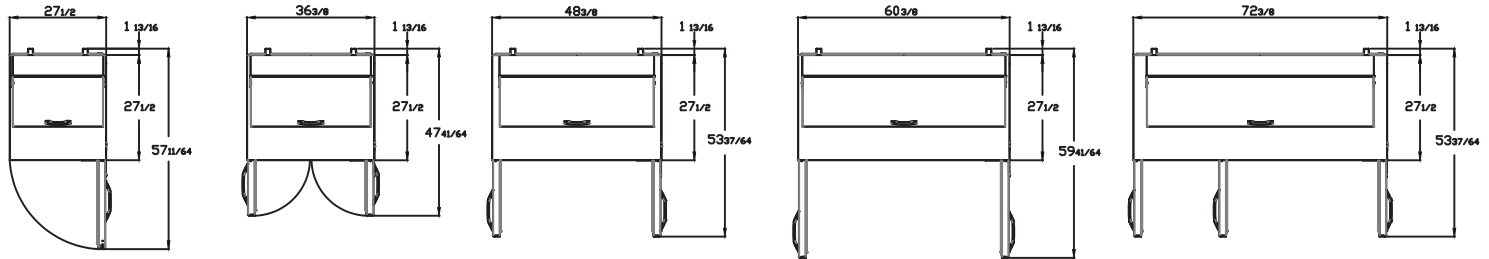

- Front View -

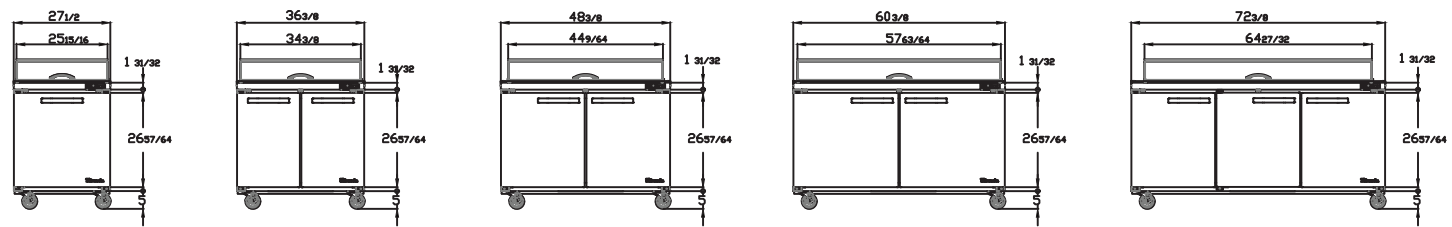

**BLPT28-HC**


**BLPT36-HC**

**BLPT48-HC**


**BLPT60-HC**

**BLPT72-HC**


Pan Configuration




**BLPT28-HC**




**BLPT36-HC**

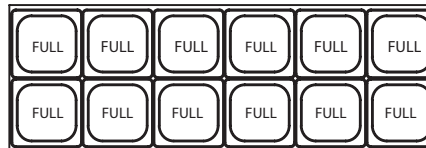

**BLPT48-HC**

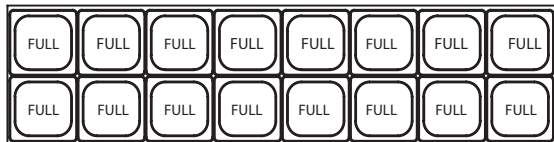


**BLPT60-HC**

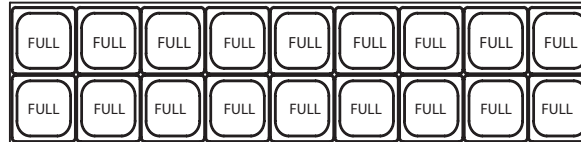

**BLPT72-HC**

- Side View -



## PRODUCT SPECIFICATION

Sandwich Prep Tables

| Model     | Product Description |                   |         | Refrigerant                      | Temperature Range | Easy Maintenance        |      |             | Cord Length (ft/m) |              |                   |           |
|-----------|---------------------|-------------------|---------|----------------------------------|-------------------|-------------------------|------|-------------|--------------------|--------------|-------------------|-----------|
|           | Sandwich Prep Table |                   |         | R-290                            | 33°F ~ 39°F       | Sliding Condensing Unit |      |             | 9.8ft (3m)         |              |                   |           |
|           | Doors               | Capacity (Cu.Ft.) | Shelves | Cabinet Dimensions (inches / mm) |                   |                         | HP   | Voltage     | Amps               | NEMA config. | Weight (lbs / kg) |           |
| L         |                     |                   |         | D                                | H                 | Net Weight              |      |             |                    |              | Ship Weight       |           |
| BLPT28-HC | 1                   | 7                 | 1       | 27 1/2" (699mm)                  | 33 1/32" (839mm)  | 42 1/2" (1082mm)        | 1/4+ | 115V / 60Hz | 4.0                | NEMA 5-15    | 157 (71)          | 203 (92)  |
| BLPT36-HC | 2                   | 9.5               | 2       | 36 3/8" (923mm)                  | 33 1/32" (839mm)  | 42 1/2" (1082mm)        | 1/4+ | 115V / 60Hz | 4.1                | NEMA 5-15    | 187 (85)          | 234 (106) |
| BLPT48-HC | 2                   | 13.1              | 2       | 48 3/8" (1227mm)                 | 33 1/32" (839mm)  | 42 1/2" (1082mm)        | 1/4+ | 115V / 60Hz | 4.5                | NEMA 5-15    | 223 (101)         | 289 (131) |
| BLPT60-HC | 2                   | 16.7              | 2       | 60 3/8" (1533mm)                 | 33 1/32" (839mm)  | 42 1/2" (1082mm)        | 1/4+ | 115V / 60Hz | 4.7                | NEMA 5-15    | 258 (117)         | 340 (154) |
| BLPT72-HC | 3                   | 20.2              | 3       | 72 3/8" (1839mm)                 | 33 1/32" (839mm)  | 42 1/2" (1082mm)        | 1/4+ | 115V / 60Hz | 5.3                | NEMA 5-15    | 309 (140)         | 390 (177) |

\*BLUE AIR has the right to change specifications without further notice.



www.blueairfse.com  
info@blueairfse.com  
**1.866.677.8500**

223 W. Rosecrans Ave., CA 90248  
T: 310.808.0102 F: 310.808.0242  
9 W. Shelton Terrace #A, Hillside, NJ 07205  
T: 310.808.0102 F: 310.808.0242