

POTATO PEELER PI-10

10 Kg. / 22 pounds load per cycle.



FEATURES AND BENEFITS

- √ Construction in stainless steel.
- ✓ Lateral stirrers covered with silicon carbide abrasive (approved by NSF).
- √ Aluminium base plate lined with silicon carbide abrasive (approved by NSF), easily removable for cleaning purposes.
- ✓ Auto-drag of waste to the drain.
- ✓ Energy efficiency owing to engine optimisation.
- ✓ Liftable transparent polycarbonate cover, complete with locking and safety device.
- ✓ Aluminium door with hermetic seal and safety device.
- √ Waterproof control board (IP65): Improved reliability against moisture and water splash.
- √ Water inlet system with non-return air break.
- Auxiliary contact for external electric valve.
- √ 0-6min timer and possibility of continuous operation.

SALES DESCRIPTION

Stainless steel construction commercial potato peeler.

Also suitable to peel carrots and other similar products.

0-6 min. timer.

Removable plate for easy cleaning.









Item Qty	Project	Date
	Item	Qty

Approved



POTATO PEELER PI-10

10 Kg. / 22 pounds load per cycle.

SPECIFICATIONS

Hourly production: 450 lbs. / 550 lbs.

Capacity per load: 22 lbs. Timer (min-max): 0 ' - 6 ' Total loading: 0.75 Hp

Electrical supply: 120V / 60 Hz / 1 \sim (5 A)

External dimensions (WxDxH)

✓ Width: 17 "✓ Depth: 25 "

√ Height: 24.6 "


External dimensions with stand


√ Width with stand: 17 "

✓ Depth with stand: 25.1 "

✓ Height with stand: 41 "

Net weight: 86 lbs.

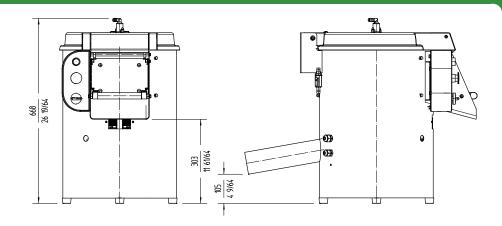



AVAILABLE MODELS

1000608 Potato peeler PI-10 120/60/1

Accessories

☐ Stands for potato peelers

S sammic	www.sammic.us
Food Service Equiment Manufacture	

usa@sammic.com 1225 Hartrey Avenue 60202-1056 Evanston, IL





Project Dat	re
Item Qty	,

^{*} Ask for special versions availability