

A family company manufacturing in the USA

www.glastender.com



Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Ice Bins

See reverse side for model number key

Standard Features

- · All stainless steel construction
- One-piece, seamless top and backsplash
- PVC plastic breaker strip around ice bin liner: creates 5/16" raised edge around liner, acts as thermal barrier to prevent heat transfer, and makes the cover slide easier.
- Tubing chase available centered in backsplash of 12" and larger models. Specify accessory model #TC-BS.
- Available in 6" incremental lengths from 6" to 48"
- 24" deep version provides larger ice bin not just a deck extension on the back of the 19" deep model
- · Sliding stainless steel cover
- CFC free foamed-in-place insulation
- · Adjustable stainless steel bullet feet
- Ten circuit available with all 24" and wider models (add suffix '-CP10' to model number)
- Extra deep version is optional (add suffix '-ED' to model number)



To view underbar installation instructions, please visit; http://www.glastender.com/PDF/F-750-165 Underbar Installation Instructions.pdf To view cleaning and care instructions, please visit: http://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Specifications

Drain

- Non-cold plate model: 1-1/2" tailpiece
- Ten circuit cold plate model '-CP10': 3/4" MPT

Tubing Chase in Backsplash (Optional)

• 2-3/8" by 4" hole centered in backsplash

• Two-piece sliding cover, 20 gauge stainless steel, included with all models

Cold Plate (Models with '-CP10' suffix)

- Ten circuit available with all 24" and wider models
- Connection is 5/16" O.D. stainless steel tubing with swaged end

Liner Depth

- 10-1/2" standard
- 14-1/2" for extra deep models

Ice Capacity

- "A" depth standard = 2.79 lbs X length
- "A" depth extra deep = 3.85 lbs X length
- "B" depth standard = 3.54 lbs X length
- "B" depth extra deep = 4.89 lbs X length

- 1-5/8" diameter 16 gauge stainless steel
- · Stainless steel bullet feet


Materials

- 20 gauge stainless steel
- PVC plastic breaker strip around opening of ice bin liner

Glastender, Inc. • 5400 North Michigan Road • Saginaw, MI • 48604-9780 Approval/Notes: 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com Specifications subject to change without notice. For current specifications please visit our website.

Dimensional Information


"A" Depth-19" Deep Models

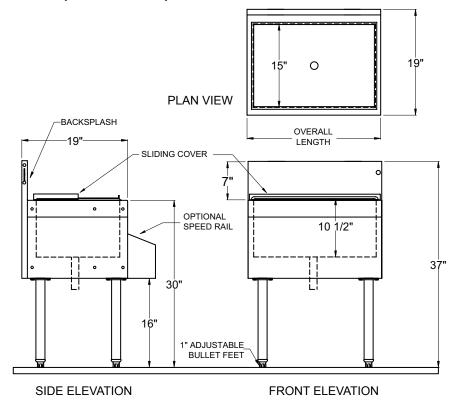

Model Number	Overall Length
IBA-6*	6"
IBA-12	12"
IBA-18	18"
IBA-24	24"
IBA-30	30"
IBA-36	36"
IBA-42	42"
IBA-48	48"

^{*} Note: 6" unit cannot be free standing

"B" Depth-24" Deep Models

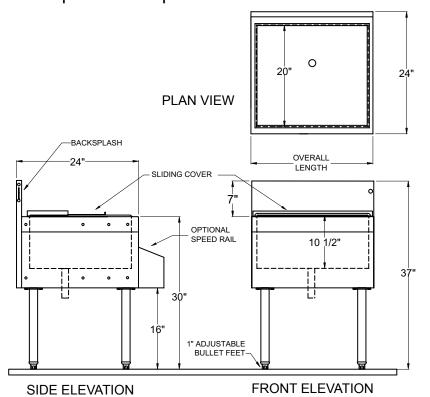

Model Number	Overall Length	
IBB-6*	6"	
IBB-12	12"	
IBB-18	18"	
IBB-24	24"	
IBB-30	30"	
IBB-36	36"	
IBB-42	42"	
IBB-48	48"	

^{*} Note: 6" unit cannot be free standing



5400 North Michigan Road • Saginaw, MI • 48604-9780

989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com