

PROJECT:		
ITEM #		OTY:
MODEL#		•
AIA #	SIS #	

SANDWICH PREP REFRIGERATOR WITH DRAWERS

VSPD60HC-16-4















CABINET CONSTRUCTION

- · Stainless Steel Exterior (galvanized back and bottom)
- · Aluminum Interior
- · Hinged, Insulated Flat Lift-Up Lid
- · One-Piece, Snap-In Magnetic Drawer Gaskets
- · Heavy-Duty Aluminum Pan Liner
- · 8' Cord And Plug (see electrical data for details)

REFRIGERATION

- · Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- · Rear Mounted Refrigeration System
- Adaptive Defrost For Reduced Energy Consumption And More **Consistent Product Temperatures**
- · Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F to 38°F

FEATURES

- Full Electronic Control
- · Low Profile Horizontal Drawers Handles
- · Stay-Open Drawer Feature For Easy Product Loading
- · Accommodates Up To 6" Deep Food Service Pans
- · Heavy-Duty Stainless Steel Drawer Frames
- Heavy-Duty Pan Divider Supports Supplied
- Locking Divider Bars
- Telescoping Drawers Slides With Locking Mechanism
- Accommodates 6" Deep Full Size Food Service Pans In Both Upper And Lower Drawers (pans not included)
- 10" Composite Cutting Board
- · 6" Casters Two With Brakes

•	3 Year Parts & Labor Warranty		
	Plus An Additional 4 Year Compressor Warranty		
	Evaluative O Veer Managety On Magnetic Deer Con		

- Lifetime Warranty On Handles & Hinges (Parts Only)



OPTIONS & ACCESSORIES

- Secure-Temp™ Technology
- · Stainless Steel Interior
- · Stainless Steel Back
- · Drawer Locks 16 Pan Cover

- · Garnish Rack (full & half pan)
- 12" Cross Bar
- · Front Or Side Crumb Catcher
- · Roll Top Cover
- 6" Legs Or 6" Seismic Legs
- · Casters: 3", Roller Kit, Low Profile
- Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)


3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Rev 1/6/20 Printed in U.S.A. APPROVAL: _ DATE: _



VSPD60HC-16-4

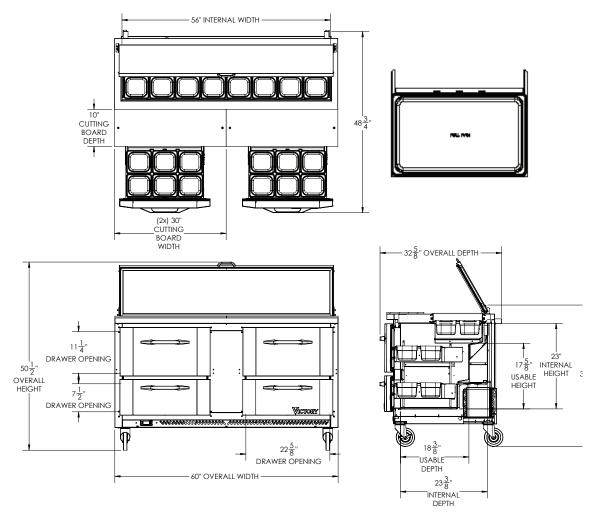

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity	16.0	Cabinet Voltage	115/60/1	Height	49"
Width, Overall (in.)	60"	Total Amperes	5.4	Width	63"
Depth, Overall (with handle & bumper)	32 5/8"	NEMA Plug* (8' cord)	5-15P	Depth	38"
Height Overall (6" casters)	50 1/2"	REFRIGERATION DATA		Crated Weight	450 lbs
Depth, Drawer Extended	48 3/4"	Condensing Unit Size, HP*	1/3	*NOTE: Remote units are field wired and comes with 6' legs. Refrigerant must be specified at time of order.	
Drawer Openings (in.)	22 5/8" x 11 1/4" 22 5/8" x 7 1/2"	Refrigerant*	R-290		
No. Of Drawers	4	Capacity (BTU/HR) (100°F/20°F)	2291		
No. Of Pans	16				

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 1/6/20 Printed in U.S.A.

